

IP 41

WE BRING GOOD THINGS TO YOU

SPLIT TYPE DISTRIBUTION BOARDS (DIN RAIL BOARDS)

TP&N

TPN split Din Rail Distribution boards are available in various designations and can be customized as required. Our Basic colours are White & Grey, optional colours can be provided as required.

BSLI MCB Distribution Board


arranged with:

- Three phase 415V 50Hz AC Supply.
- MCB's are SP, DP & TP.
- Power and Lighting Section splitted by separate ELCB and Interiors.
- Interior with Copper tinned coated busbar.
- Busbar rated for 150 amps.
- Surface or Flush mounted.
- Ambient temperature 50°C.

Cabling and Installation:

- Comprehensive cable entry facilities.
- Ease of Installation, cabling & maintenance.
- Universal fixing facilities.
- Neutral bars are mounted on a separate insulator.
- Sufficient space for cable/wires.

Various brands & Rating of Isolators, ELCB's, MCB's can be provided as per our stock availability.
IP 65 can be manufactured as required.

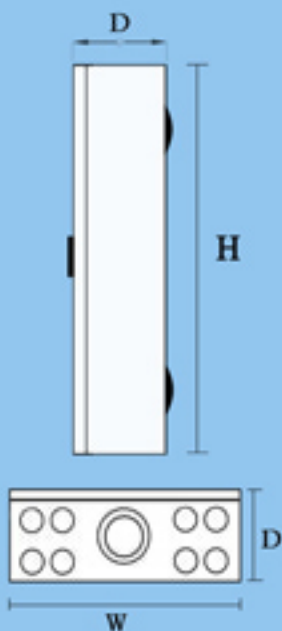

ITEM	Busbar Rating	TPN Split	Incomer Isolator	Lighting ELCB 300mA	Power ELCB 30mA	Width mm	Height mm	Depth mm
1	150A	2+2W	100A	63A	63A	400	610	100
2	150A	4+2W	100A	63A	63A	400	700	100
3	150A	4+4W	100A	63A	63A	400	700	100
4	150A	6+2W	100A	63A	63A	400	700	100
5	150A	6+4W	100A	63A	63A	400	760	100
6	150A	6+6W	100A	63A	63A	400	850	100
7	150A	8+2W	100A	63A	63A	400	760	100
8	150A	8+4W	100A	63A	63A	400	850	100
9	150A	8+6W	100A	63A	63A	400	930	100
10	150A	8+8W	100A	63A	63A	400	930	100
11	150A	10+2W	100A	63A	63A	400	850	100
12	150A	10+4W	100A	63A	63A	400	930	100
13	150A	10+6W	100A	63A	63A	400	930	100
14	150A	12+2W	100A	63A	63A	400	930	100
15	150A	12+4W	100A	63A	63A	400	930	100
16	150A	12+6W	100A	63A	63A	400	1000	100
17	150A	12+8W	100A	63A	63A	400	1050	100